

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 07-073419

(43)Date of publication of application : 17.03.1995

(51)Int.Cl.

G11B 5/39
G11B 5/31

(21)Application number : 05-218310

(71)Applicant : MATSUSHITA ELECTRIC IND CO LTD

(22)Date of filing : 02.09.1993


(72)Inventor : FUJISHIMA TAKESHI
TOMIYASU HIROSHI

(54) MAGNETO-RESISTANCE EFFECT TYPE THIN FILM MAGNETIC HEAD

(57)Abstract:

PURPOSE: To prevent static electricity from discharging between members by bringing a lower magnetic shield layer, an upper magnetic shield layer, and a magnetic core into contact with one of two lead parts.

CONSTITUTION: A lower magnetic shield layer 6, an upper magnetic shield layer 14, and magnetic cores 9 and 15 are brought into contact with one of two lead parts 13a and 13b to electrically connect the lower shield layer 6, etc., to two lead parts 13a and 13b and an MR element 4. Since the static electricity charged in the lower magnetic shield layer 6 or the like at the time of production or use of an MR head is leaked to two grounded lead parts 13a and 13b, static electricity discharging between the lower shield layer 6 or the like and lead parts 13a and 13b or the like is prevented. Consequently, the yield of the MR head is improved, and the MR head is stably used.

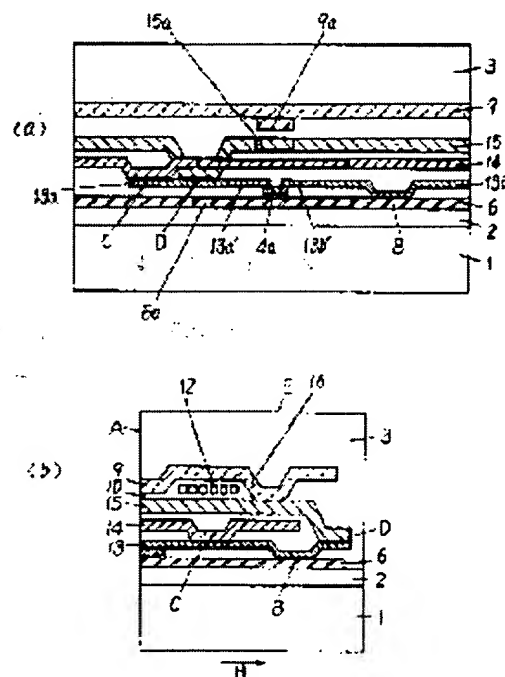

LEGAL STATUS

[Date of request for examination] 08.04.1997

[Date of sending the examiner's decision of rejection] 04.04.2000

[Kind of final disposal of application other than the examiner's decision of rejection or application]

converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection] 2000-06706

[Date of requesting appeal against examiner's decision of rejection] 08.05.2000

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office